



SOT-363 Plastic-Encapsulate Transistors


MMDT2222A DUAL TRANSISTOR (NPN+NPN)

FEATURE


Complementary PNP Type available MMDT2907A

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	75	V
V_{CEO}	Collector-Emitter Voltage	40	V
V_{EBO}	Emitter-Base Voltage	6	V
I_{c}	Collector Current -Continuous	600	mA
P_{c}	Collector Power Dissipation	200	mW
$T_{\text{J}}, T_{\text{stg}}$	Operation Junction and Storage Temperature Range	-55~+150	$^{\circ}\text{C}$

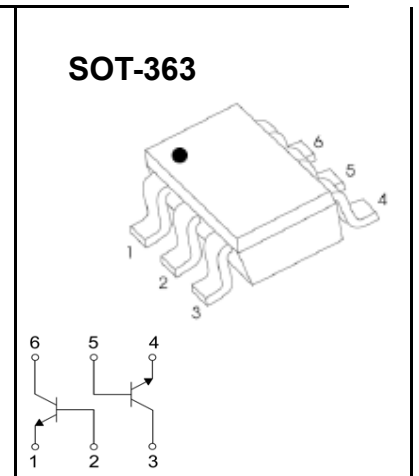

MARKING: K1P



ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 10\mu A, I_E = 0$	75		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 10mA, I_B = 0$	40		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 10\mu A, I_C = 0$	6		V
Collector cut-off current	I_{CBO}	$V_{CB} = 60V, I_E = 0$		10	nA
Collector cut-off current	I_{CEX}	$V_{CE} = 60V, V_{EB(off)} = 3V$		10	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = 3V, I_C = 0$		10	nA
DC current gain	$h_{FE(1)}$	$V_{CE} = 10V, I_C = 0.1mA$	35		
	$h_{FE(2)}$	$V_{CE} = 10V, I_C = 1mA$	50		
	$h_{FE(3)}$	$V_{CE} = 10V, I_C = 10mA$	75		
	$h_{FE(4)}$	$V_{CE} = 10V, I_C = 150mA$	100	300	
	$h_{FE(5)}$	$V_{CE} = 10V, I_C = 500mA$	40		
	$h_{FE(6)}$	$V_{CE} = 1V, I_C = 150mA$	35		
Collector-emitter saturation voltage	$V_{CE(sat)1}$	$I_C = 150mA, I_B = 15mA$		0.3	V
	$V_{CE(sat)2}$	$I_C = 500mA, I_B = 50mA$		1	V
Base-emitter saturation voltage	$V_{BE(sat)1}$	$I_C = 150mA, I_B = 15mA$	0.6	1.2	V
	$V_{BE(sat)2}$	$I_C = 500mA, I_B = 50mA$		2	V
Transition frequency	f_T	$V_{CE} = 20V, I_C = 20mA,$ $f = 100MHz$	300		MHz
Output Capacitance	C_{ob}	$V_{CB} = 10V, I_E = 0, f = 1MHz$		8	pF
Input Capacitance	C_{ib}	$V_{EB} = 0.5V, I_C = 0, f = 1MHz$		25	pF
Noise Figure	NF	$V_{CE} = 10V, I_C = 100\mu A,$ $f = 1KHz, R_s = 1K\Omega$		4	dB

Switching characteristics


Parameter	Symbol	Test conditions	Min	Max	Unit
Delay time	t_d	$V_{CC} = 30V, I_C = 150mA,$ $V_{BE(off)} = 0.5V, I_{B1} = 15mA$		10	ns
Rise time	t_r			25	ns
Storage time	t_s	$V_{CC} = 30V, I_C = 150mA,$ $I_{B1} = -I_{B2} = 15mA$		225	ns
Fall time	t_f			60	ns

Typical Characteristics


Static Characteristic

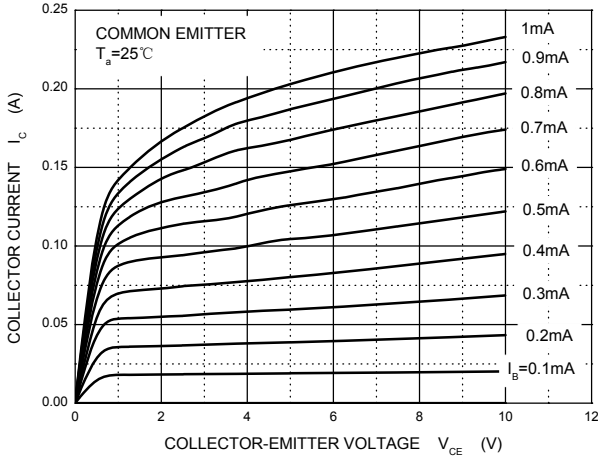


h_{FE} — I_C

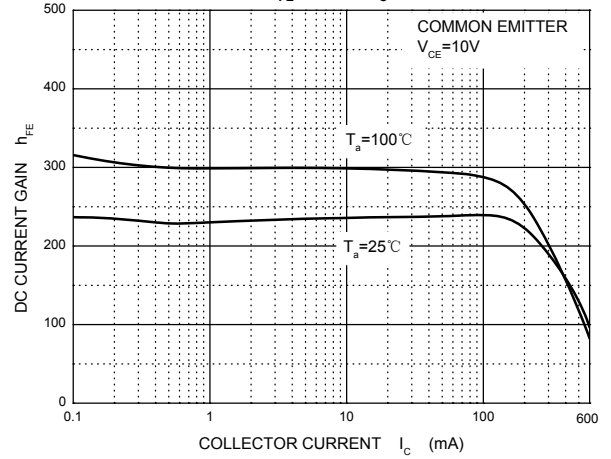


V_{CEsat} — I_C

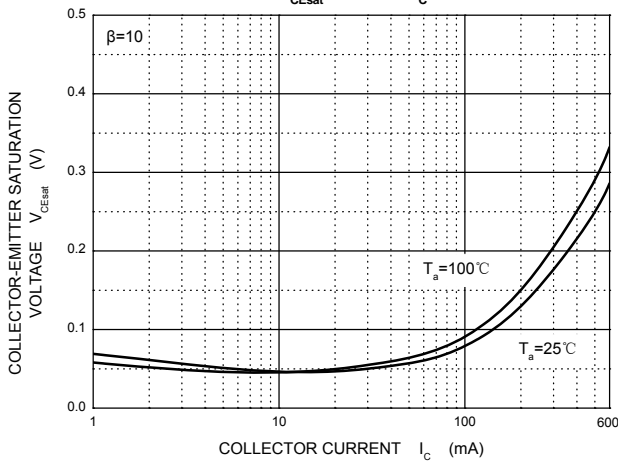


V_{BEsat} — I_C

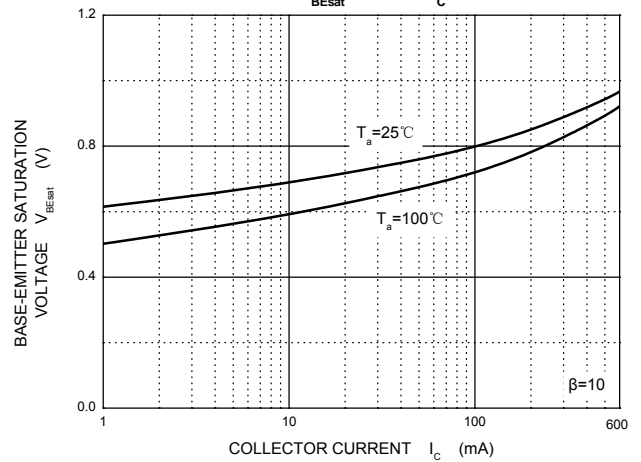


I_C — V_{BE}

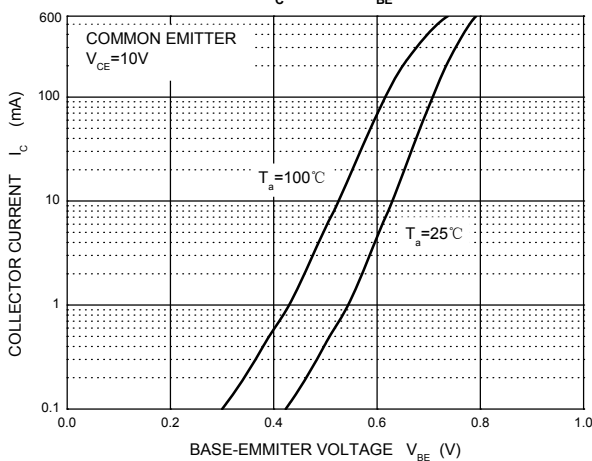


C_{ob}/C_{ib} — V_{CB}/V_{EB}

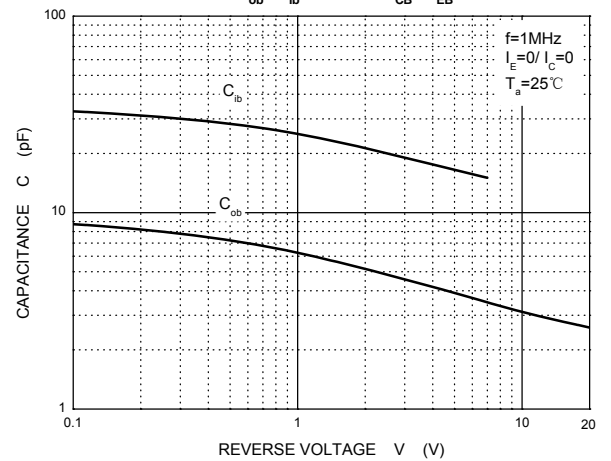




f_T — I_C

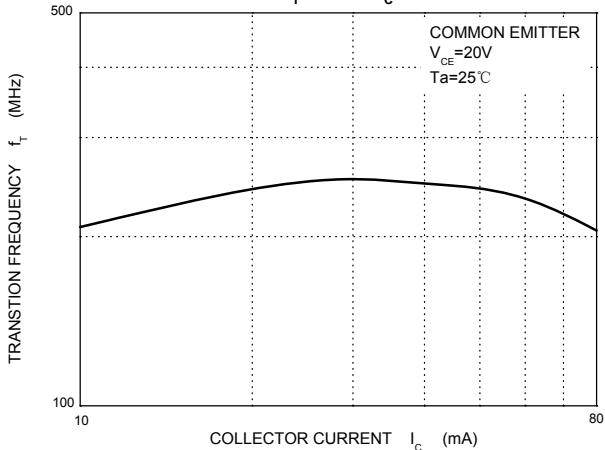

P_c — T_a

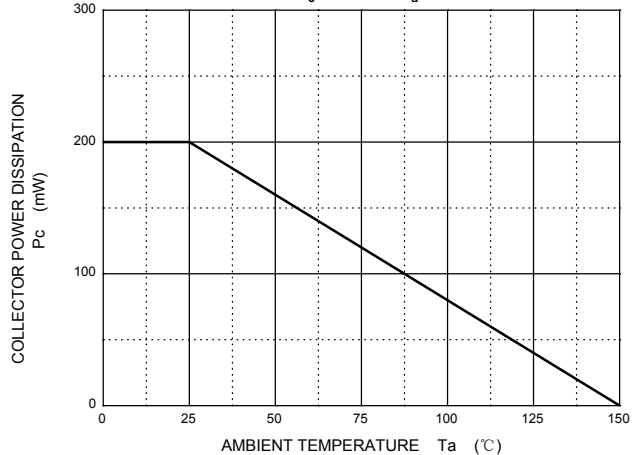


SOT-363 Package Outline Dimensions

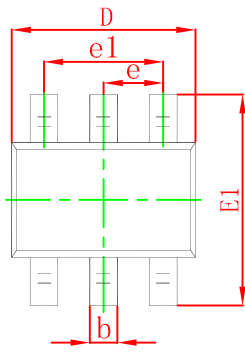

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
c	0.100	0.150	0.004	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.400	0.085	0.094
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

SOT-363 Suggested Pad Layout

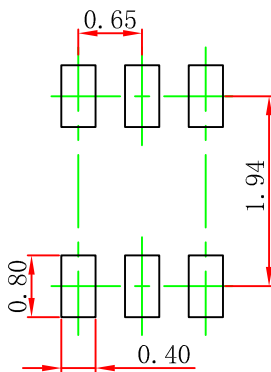


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

SOT-363 Tape and Reel

SOT-363 Embossed Carrier Tape

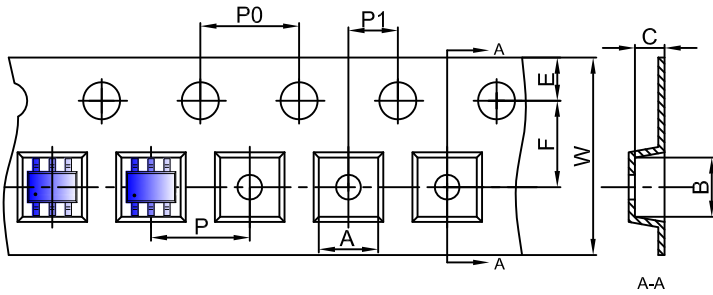


Packaging Description:


SOT-363 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-363	2.25	2.55	1.20	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-363 Tape Leader and Trailer

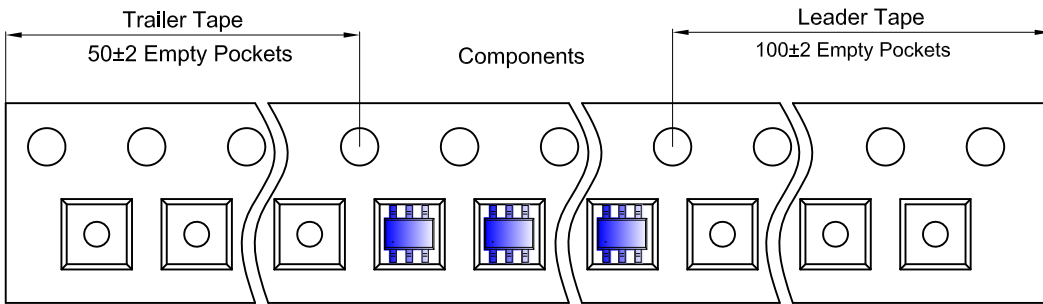

SOT-363 Reel

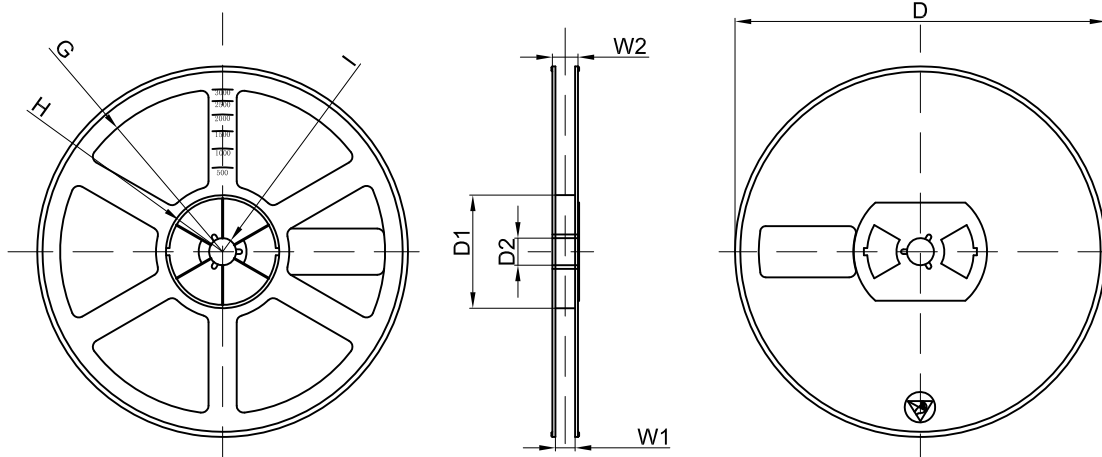

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	